



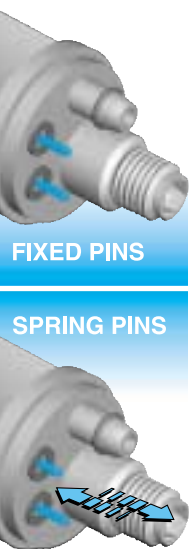

### PACKAGING

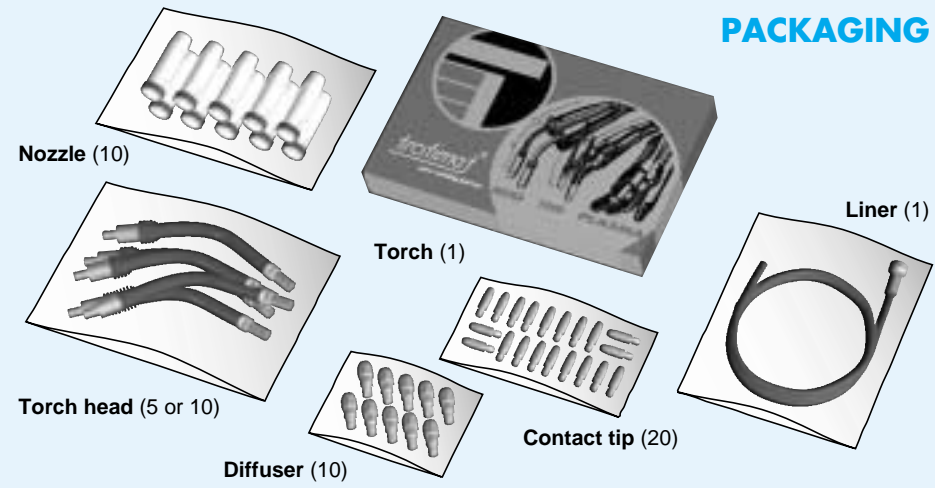


ERGOPLUS 400	m	Liner	Adaptor
<b>MB 7703</b>	3	GM 530	AR 59
<b>MB 7704</b>	4	GM 531	AR 59
<b>MB 7705</b>	5	GM 532	AR 59
<b>MB 7743</b>	3	GM 530	AR 52
<b>MB 7744</b>	4	GM 531	AR 52
<b>MB 7745</b>	5	GM 532	AR 52

- Wire conduit**
  - QB 72 3 m
  - QB 73 4 m
  - QB 74 5 m
- Control leads**
  - BX 156 3 m
  - BX 157 4 m
  - BX 158 5 m
- Gas hose**
  - QB 80 3 m
  - QB 81 4 m
  - QB 82 5 m
- Water inlet hose**
  - QB 76 3 m
  - QB 77 4 m
  - QB 78 5 m
- Water and power cable**
  - QA 19 3 m
  - QA 20 4 m
  - QA 21 5 m
- Cable assembly cover**
  - MQ 205 3 m
  - MQ 206 4 m
  - MQ 207 5 m



# ERGOPLUS 400

MIG TORCHES



EN 50078



trafimet®

your welding partner


TRAFIMET spa states that product indicated on this catalogue is manufactured in conformity with the "low voltage" directive CE 73/23 as expected on standard EN 50078. We reserve the right to modify, without notice, any of our products. TRAFIMET spa is the registered owner of all trademarks patents and models.

Copyright © April 1997 • by TRAFIMET spa (Print 02/99) EA 0505

trafimet®  
your welding partner

### PLUS HANDLE


- MP 36 Black • Standard
- MP 37 Red
- MP 38 Blue

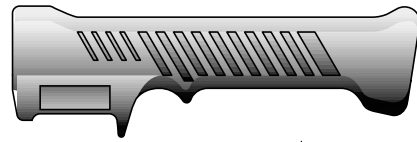

- BX 20 • Standard
- BX 67 Microswitch

### ERGOPLUS HANDLE

- MP 133 Black
- MP 134 Red
- MP 135 Blue • Standard

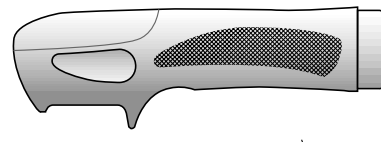

- BX 24 • Standard
- BX 68 Microswitch

- ME 81 M6
- ME 76 M8 • Standard

- ME 82 M6
- ME 83 M8

- ME 579 Ceramic • Standard

- ME 74 Plastic black
- ME 79 Plastic white
- ME 479 Plastic brown

- M6
- MD 9-08 Ø 0.8
- MD 9-09 Ø 0.9
- MD 9-10 Ø 1.0
- MD 9-12 Ø 1.2
- MD 9-16 Ø 1.6

- MD 9-58 Ø 0.8
- MD 9-60 Ø 1.0
- MD 9-62 Ø 1.2
- MD 9-66 Ø 1.6
- MD 9-78 Ø 0.8
- MD 9-80 Ø 1.0
- MD 9-82 Ø 1.2

- ALUMINIUM
- CuCrZr

- M8
- MD 5-08 Ø 0.8
- MD 5-10 Ø 1.0
- MD 5-12 Ø 1.2
- MD 5-14 Ø 1.4
- MD 5-16 Ø 1.6
- MD 5-20 Ø 2.0


- ALUMINIUM
- CuCrZr
- MD 5-58 Ø 0.8
- MD 5-60 Ø 1.0
- MD 5-62 Ø 1.2
- MD 5-66 Ø 1.6
- MD 5-80 Ø 1.0
- MD 5-82 Ø 1.2 • Standard
- MD 5-86 Ø 1.6

- MC 268 • Standard
- MC 290
- MC 291
- MC 292
- MC 293


- BX 206
- AR 59 Fixed pins
- FA 26
- EA 128

- BX 206
- AR 52 Spring pins
- FA 26
- EA 128

- BX 206
- AR 105 2 Spring pins  
1 Female pin
- FA 26
- EA 128



	m	(wire 0.8 + 1.0)	(wire 1.0 + 1.2)	(wire 1.2 + 1.6)	(wire 2.0 + 2.4)
STEEL	3	GM 522	GM 526	GM 530	GM 534
	4	GM 523	GM 527	GM 531	GM 535
	5	GM 524	GM 528	GM 532	GM 536
	3	GM 600	GM 610	GM 760	-
	4	GM 601	GM 611	GM 761	-
TEFLON	5	GM 602	GM 612	GM 762	-

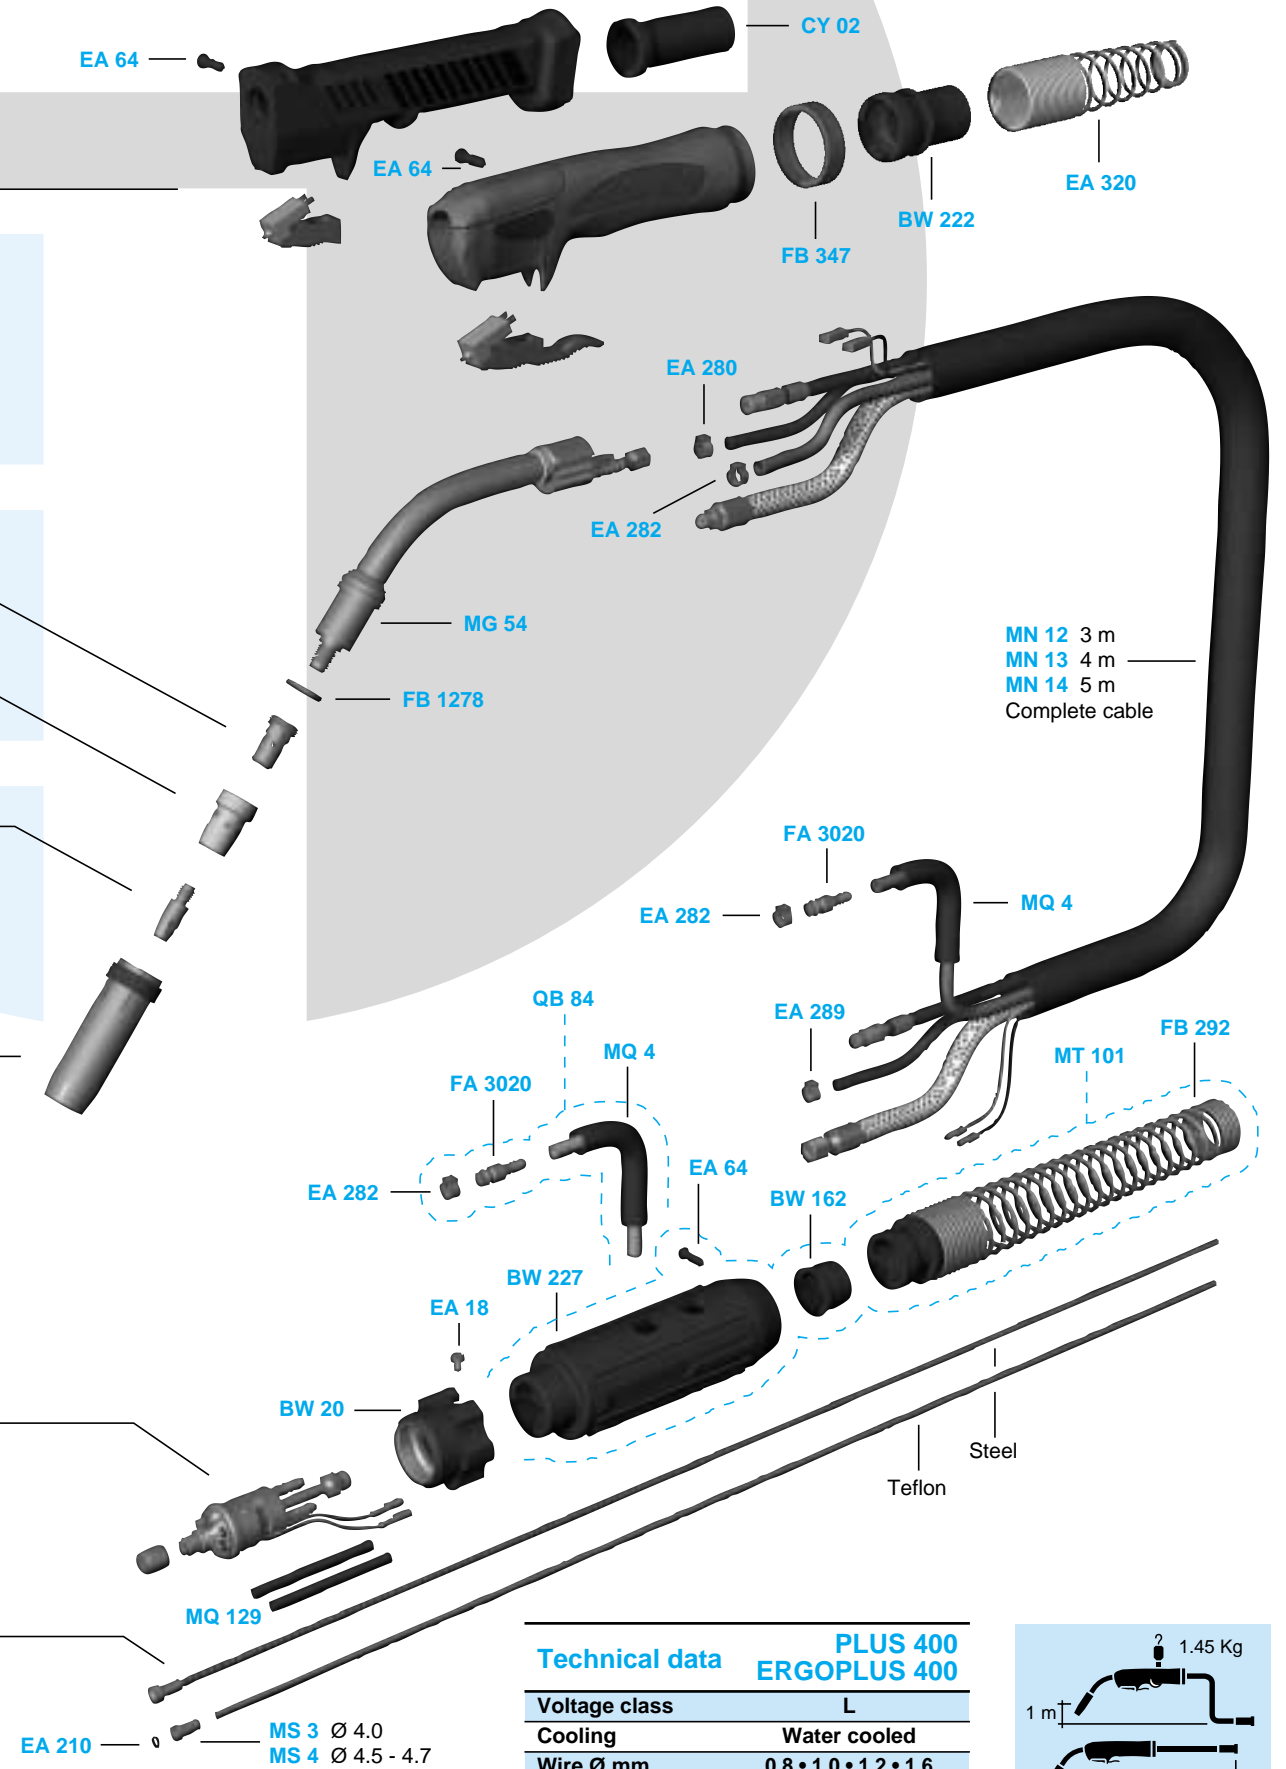

Technical data		PLUS 400 ERGOPLUS 400
Voltage class		L
Cooling		Water cooled
Wire Ø mm		0.8 • 1.0 • 1.2 • 1.6
Duty cycle 100%		400A CO <sub>2</sub> • 350A Mix

